




HMSA BEARING MANUFACTURING LIMITED

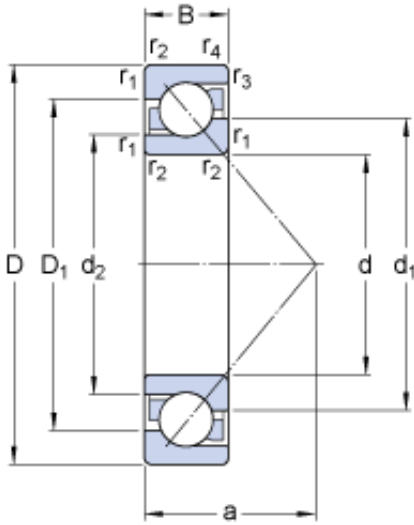

7412 BGAM Bearing 2D drawings and 3D CAD models

60 mm x 150 mm x 35 mm skf 7412 BGAM Single row angular contact ball bearings

Bearing No. 7412 BGAM

Size	150x60x35 mm
Bore Diameter	150 mm
Outer Diameter	60 mm
Width	35 mm
d	60 mm
D	150 mm
B	35 mm
d ₁	95.15 mm
d ₂	77.95 mm
D ₁	116.46 mm
a	62 mm
r _{1,2} - min.	2.1 mm
r _{3,4} - min.	2.1 mm
d _a - min.	55 mm
D _a - max.	110 mm
D _b - max.	135.4 mm
r _a - max.	2 mm
r _b - max.	2 mm
Basic dynamic load rating - C	119 kN
Basic static load rating - C ₀	86.5 kN
Fatigue load limit - P _u	3.6 kN
Reference speed	5600 r/min
Limiting speed	6000 r/min
Calculation factor - k _r	0.1



HMSA BEARING MANUFACTURING LIMITED

Calculation factor - k_a	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	3.05
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Brass
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Preload	Light
Mounting Arrangement	Universal
Inch - Metric	Metric



HMSA BEARING MANUFACTURING LIMITED

Long Description	60MM Bore; 150MM Outside Diameter; 35MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7412 BGAM
Weight / LBS	6.724
Width	1.378 Inch 35 Millimeter
Bore	2.362 Inch 60 Millimeter
Outside Diameter	5.906 Inch 150 Millimeter
bore diameter:	60 mm
maximum temperature:	257 ° F
outside diameter:	150 mm
cage material:	Brass
overall width:	35 mm
maximum rpm:	6000 rpm
contact angle:	40 °
finish/coating:	Uncoated
row type & fill slot:	Single-Row Non-Fill Slot
fillet radius:	2.1 mm
bore type:	Round
series:	7400
closure type:	Open
weight:	7.28 lbs
bearing material:	Steel



HMSA BEARING MANUFACTURING LIMITED

manufacturer product page:	Click here
radial dynamic load capacity:	119 kN
manufacturer upc number:	7316571273907
radial static load capacity:	86.5 kN
d_1	95.15 mm
d_2	77.95 mm
D_1	116.46 mm
$r_{1,2}$ min.	2.1 mm
$r_{3,4}$ min.	2.1 mm
d_a min.	55 mm
D_a max.	110 mm
D_b max.	135.4 mm
r_a max.	2 mm
r_b max.	2 mm
Basic dynamic load rating C	119 kN
Basic static load rating C_0	86.5 kN
Fatigue load limit P_u	3.55 kN
Calculation factor A	0.144
Calculation factor k_r	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	3.3 kg